



### COMPONENTS



- KNUCKLES (2, DRAWING 20005)
- FINGERS (2, DRAWING 20006)
- TENDONS (2, DRAWING 20007)
- 1/4-20 x 1" SS HEX SOCKET CAP SCREWS (6)
- 1/4 x 1 SLOTTED SPRING PINS (2)

### REVISIONS

| REV | DESCRIPTION | DATE | APPROVED |
|-----|-------------|------|----------|
|-----|-------------|------|----------|

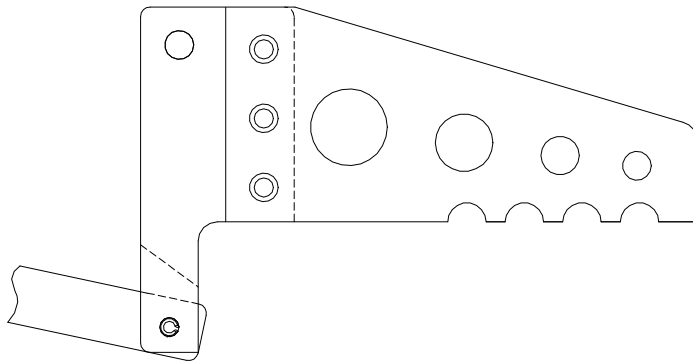

LEFT FINGER ASSEMBLY

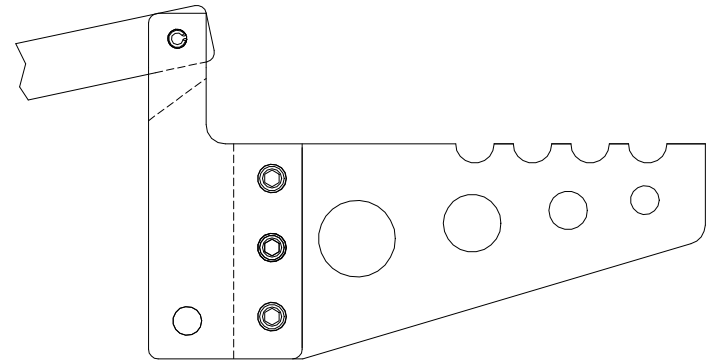

RIGHT FINGER ASSEMBLY

### NOTES

- ATTACH TENDONS TO KNUCKLES USING SLOTTED SPRING PINS
- FINGERS INCLUDE HELICOILS FOR THE 1/4-20 BOLTS

|         |       |             |                              |       |           |
|---------|-------|-------------|------------------------------|-------|-----------|
| DWG NO. | 20567 | DESCRIPTION | FINGER ATTACHMENT TO KNUCKLE | DATE  | 31 AUG 20 |
| SCALE   | 1:2.5 | DRAFTSMAN   | SMYTH                        | SHEET | 1/1       |